






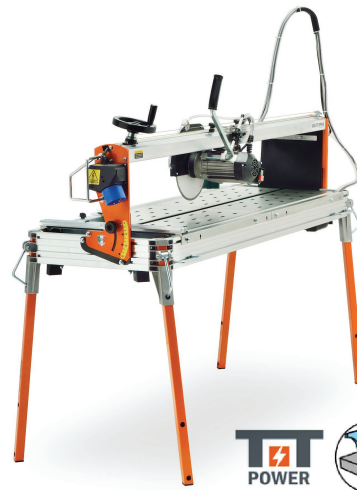


# BATTIPAV™

## CLASS PLUS 1300



TECHNICAL SPECIFICATIONS		OPTIONAL
Blade (Ø mm)*	250	 Wheels kit
Max. straight cutting length (mm)	Thickness <= 42 mm: 1300 Thickness > 42 mm: 1160	
Max. cutting depth for straight cut (mm)	65	 Laser instrument
Max. size tile for diagonal cutting (mm)	Thickness <= 42 mm: 920 x 920 Thickness > 42 mm: 820 x 820	
Max. cutting depth with 2 runs (mm)	80	 B-Lock for thickness up to 40 mm
Max. cutting depth for 45° angle cut (mm)	53	
Tool hole (Ø mm)	25.4	 Tile lock system
Rotation speed (rpm)	2800	
Motor type	1 phase - 230V ~ 50HZ	 Extension side bench
Motor power (HP / kW, A)	1.8 / 1.4, 6.0	
Water recycling pump type	S1	 Side tile support
Water tank capacity (Min. / Max.) (ltrs.)	22 / 28	
Thermic protection (°C)	170	 Long slot for side tile support
Net weight (kg)	52	
Cutting progress system	Included	

\*Diamond blade included.

A radial tile cutter ideal for straight and 45° angle cuts on porcelain stoneware, tiles and marble. New design with vanguard technical innovation, strong and precise. Equipped with POWERFUL MOTOR sliding and plunging cutting head and tilting motor.

• Distributor: •



شركة الوسام للتجارة ط.م.م.  
**AL WISAM TRADING CO. L.L.C.**

☎ : (+971 6) 539 03 83      ✉ : awtc@alwisamllc.com  
☎ : (+971 6) 539 03 84      🌐 : www.alwisamllc.com  
📍 : 81933, Sharjah - U.A.E.