






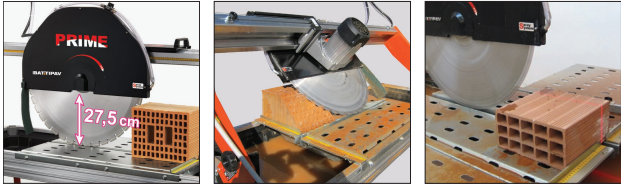


BATTIPAV™

PRIME 700



TECHNICAL SPECIFICATIONS		OPTIONAL
Blade (Ø mm)*	700	 SRS kit
Max. straight cutting length (mm)	615	 Laser instrument
Extra cut (mm)**	Up to 970 (for 700S) Up to 795	 B-Lock for thickness up to 40 mm
Max. cutting depth for straight cut (mm)	275	 Side bench with rollers
Max. size tile for diagonal cutting (mm)	435 x 435	 Extension side bench
Max. cutting depth for 45° angle cut (mm)	180	 Side tile support
Tool hole (Ø mm)	25.4	 Long slot for side tile support
Rotation speed (rpm)	1400	
Motor type	3 phase - 400V ~ 50 Hz	
Motor power (HP / kW, A)	5.5 / 4.0, 8.0	
Water recycling pump type	S3	
Water tank capacity (Min. / Max.) (ltrs.)	23 / 36	
Thermic protection (°C)	160	
Amperometrical protection (A)	10 - 16	
Net weight (kg)	113	
Wheels kit	Included	
Cutting progress system	Included	

*Diamond blade not included.

** (S) code for machine includes laser instrument

Ideal for the building sector. New design with vanguard technical innovation, strong and precise, suitable for cutting brick blocks, natural stones, poroton & concrete blocks.

• Distributor: •



شركة الوسام للتجارة ط.م.م.
AL WISAM TRADING CO. L.L.C.

☎ : (+971 6) 539 03 83 ✉ : awtc@alwisamllc.com
☎ : (+971 6) 539 03 84 🌐 : www.alwisamllc.com
📍 : 81933, Sharjah - U.A.E.